

(54) Title: AEROSOL DISPENSING DEVICE

(37) Abstract

The dispenser (1) is for a medicament in a several container (2), which is mounted in a body (3), while a sleeve (4) is a member allowing flow in past the container, with the aerosol outlet tube (7) attached to a necklet (10) in a block (17) extending from the face (12) of the body. The container is of the type which dispenses a compressed dose on depression of the tube towards the member's body (7). The tube (2) is a gas tight seal to the necklet (10). The block has a polyethylene tube (11) adhered near a side opening (12) of the block, in communication with the necklet (4). The tube has a pair (13, 14) of flaps to be in contact opposite from the block is adhered to a plate (15) in a monophong (16). The plate is located in a cylinder (17) formed in the body (3). To the outside of the cylinder is clipped an orificator (18) of the body, having a membrane (19) with an inhibition orifice (20). The orificator provides an enlargement (21) in the bore (22) of the cylinder (17). The enlargement stops down in distance to that of the (zero-chamber) membrane, providing an obstruction for a spring (23) acting on the plate and urging it in the direction of the necklet. Normally the tube is blocked (11, 14) by the action of the spring in such extent that it is elevated and acts as a valve (24). Thus when a dose is released into the necklet (5), it is contained by the valve (24). On inhibition through the monophong, the plate is drawn against the membrane against the action of the spring by the sufficient pressure in the monophong.

FOR THE PURPOSES OF INFORMATION ONLY					
Codes used to identify items pertain to the PCT on the form pages of pamphlets publishing international applications under the PCT.					
AL	Albania	BO	Bolivia	LB	Lebanon
AM	Armenia	BR	Brazil	LI	Liechtenstein
AT	Austria	BS	Bosnia	LU	Luxembourg
BE	Belgium	CA	Canada	LV	Latvia
BF	Burkina Faso	CH	Switzerland	MC	Monaco
BG	Bulgaria	CL	Chile	MD	Moldova
BR	Brazil	CM	Cameroon	ME	Montenegro
BS	Bosnia	CO	Colombia	MG	Madagascar
BT	Bhutan	CZ	Czech Republic	ML	Mali
BV	Bouvet	DE	Germany	MM	Myanmar
BY	Belarus	DK	Denmark	MO	Macao
CA	Canada	EE	Estonia	MP	Marshall Islands
CB	Cambodia	EG	Egypt	MT	Malta
CC	Cocos Islands	ES	Spain	MU	Mauritius
CE	Congo	ET	Ethiopia	NA	Namibia
CF	Cote d'Ivoire	FI	Finland	NC	New Caledonia
CG	Congo	FR	France	NE	Niger
CH	Switzerland	GB	Great Britain	NI	Nicaragua
CJ	Cyprus	GD	Grenada	NL	Netherlands
CK	Cook Islands	GE	Georgia	NO	Norway
CL	Chile	GG	Guernsey	NP	Nepal
CM	Cameroon	GH	Ghana	NU	Nuove Terre
CN	China	GI	Guinea	PA	Panama
CO	Colombia	GR	Greece	PE	Peru
CU	Cuba	GT	Guatemala	PG	Papua New Guinea
CV	Cape Verde	GU	Guam	PH	Philippines
CX	Christmas	HA	Haiti	PK	Pakistan
CY	Cyprus	HN	Honduras	PL	Poland
DZ	Algeria	HR	Croatia	PT	Portugal
EC	Ecuador	IE	Ireland	RO	Romania
EE	Estonia	IL	Israel	RS	Serbia
EG	Egypt	IM	Isle of Man	RU	Russia
		IN	India	SA	Saudi Arabia

The present invention relates to a dispenser, particularly though not exclusively for dispensing aerosol or powder borne medicaments.

As used herein, "kinking" in respect of a tube means bending the tube to such extent that it collapses on itself, closing its internal passage.

It is well known to administer medicines, for instance for asthma, from a dispenser adapted to provide a metered dose under gas pressure. For satisfactory administration, the patient should inhale the medicine into his/her lungs. This is eased if the dispensing is in phase with the patient's inhalation. Various dispensers exist which are actuated by the act of inhalation.

A difficulty with breath actuated dispensing is that the force available from the act of inhalation is very small, which renders simple, reliable actuation difficult. Generally the dispenser is cocked by the application of a much greater force than can be achieved by inhalation, and the inhalation force is used to release the dose. This calls for a mechanism with several parts.

In my earlier patent No. 2,233,236, I described an aerosol medicament dispensing device in which a metered dose is received into a storage chamber and released therefrom by a breath actuated valve.

Further in another earlier application No. PCT/GB91/02118 - WO 92/09323, I have proposed another aerosol medication dispensing device in which a preload for dispensing from the aerosol is applied and resisted by pneumatic force. The pneumatic force is released by a breath actuated valve.

The object of my present invention is to provide a simpler alternative to my earlier dispensers, by providing a simple breath actuable valve which can be incorporated therein.

According to the invention there is provided a valve comprising:

- a valve inlet,
- a valve outlet,
- a flexible tube extending between the inlet and the outlet, the tube having a movable portion which is movable between an closed position in which the tube is kinked for closure of the valve and an open position in the tube is un-kinked for opening of the valve and
- a movable member for moving the movable portion of the tube to control the kinkings of the tube.

Whilst in some embodiments the uninking of tube will involve at least partial straightening of it, it should be noted that the flexible tube will in most cases allow flow whilst still curved but not kinked.

The tube itself may be a length of plastic material tube. Preferably it is permanently shaped to predetermine the position of the obturating kink(s).

In certain embodiments, the tube has a single kink when the movable member and the movable portion of the tube are in their closed position, the tube then preferably having a V or L configuration. In other embodiments, the tube has a pair of kinks when closed, the tube then preferably having a Y, M or Z configuration.

The movable portion of the tube can be an end portion of the tube, connected to or providing the inlet or the outlet of the valve, in which case the end portion of the tube can be movable axially to kink and un-kink the tube, i.e. to close and open the valve, or the end portion of the tube can be movable angularly to kink and un-kink the tube.

Alternatively the movable portion of the tube can be a middle portion of the tube, between end portions connected to or providing the inlet and the outlet of the valve.

Whilst it can be envisaged that the valve will be a normally open valve, usually it will be normally closed, a spring being provided to urge the movable member to its closed position.

In particularly preferred embodiments, the valve is breath actuable, the movable member being a vane movable by inhalation or exhalation. The vane can be a piston or a pivoted flap.

Thus the invention also provides a dispenser for a gaseous, gas borne or droplet substance, the dispenser including a valve of the invention, and further comprising:

- a body including a mouthpiece with an inhalation/insufflation orifice at its end and
- a junction for a source of gas or evaporable liquid comprising or containing the said substance,

and wherein:

- the vane is movably mounted in the body for movement by the act of inhalation from a rest position towards the orifice - or at least in the direction of air flow through the dispenser - and
- the valve is connected to the junction for controlling the said gas or liquid with the valve inlet being at the junction, the flexible tube extending from the junction for receiving the said gas or liquid and connected at the outlet end to the breath actuable vane for movement therewith, the tube being linked to an obturating extent when the vane is in its rest position and un-linked when the vane is moved on inhalation for release of the gas or liquid.

Whilst it is envisaged that the vane may be a diaphragm or pivoted flap, in the preferred embodiments, the vane is a piston. The vane may be inherently resilient for biasing to the rest position or may be urged there by gravity; however in the preferred embodiments, a spring is included to urge the piston to the rest position.

RECTIFIED SHEET (RULE 91)  
ISA/EP

- is provided integrally with and internally of the body in line with the one limb,
- has a socket for receiving an outlet tube of the source and
- is the junction to the valve with the socket in communication with the valve tube, and

the piston is the outlet from the valve and has the valve tube in communication with a throughbore in the piston, the arrangement being such that depression of the source in the one limb releases a dose of the said substance into the valve tube for release on valve opening by inhalation.

In this embodiment, the block preferably has a lateral communication with the valve tube and the latter has a Z configuration when kinked and closed.

In another embodiment, a dispenser is provided for use with a source of the substance in pressurised gaseous or liquid form of the type which releases a dose on depression of an outlet tube of the source, wherein:

- the body is generally L-shaped,
- one limb of the L is a sleeve for accommodating and capivating the source of gas or evaporable liquid,
- the other limb terminates as the mouthpiece,
- a block:
  - is provided movably in the body in line with the one limb,
  - has a socket for receiving an outlet tube of the source inside the body and an actuation button outside the body and
  - is the junction to the valve with the socket in communication with the valve tube, and
- the piston is the outlet from the valve and has the valve tube in communication with a throughbore in the piston,

the arrangement being such that depression of the button towards the body releases a dose of the said substance into the valve tube for release on valve opening by inhalation.

RECTIFIED SHEET (RULE 91)  
ISA/EP

Preferably, the vane is a piston slidably mounted in a bore in the body at or adjacent the mouthpiece. Usually, the body and/or the piston will be provided with an air bypass to enable air to be inhaled to bypass the piston when it has moved the tube to its un-linked, open position. The bypass can be a series of notches in a skirt of the piston and an enlargement in the bore, the bypass opening when the notches move into register with the enlargement.

In accordance with another feature, the piston is provided with a manually actuable member extending through a wall of its bore and the piston and its bore are provided with a notch and detect mechanism for holding the piston in either or both of its open and closed positions, whereby the piston can be manually moved to and held in its position holding the tube in its kinked, closed and/or to its un-linked open position by engagement of the notch and detect mechanism. Alternatively, a manually actuable member may be provided merely for holding the piston in its open position with the tube un-linked and open for purging discharges from the said source.

Where a spring is provided for normally closing the valve, it can be a compression spring biasing the piston inwardly of the mouthpiece, the spring acting between the piston and an abutment in the body. Alternatively, the spring can be a tension spring biasing the piston inwardly of the mouthpiece, the piston and a formation in the body being adapted to connect to the spring for its biasing of the piston.

In one embodiment, a dispenser is provided for use with a source of the substance in pressurised gaseous or liquid form of the type which releases a dose on depression of an outlet tube of the source, wherein:

- the body is generally L-shaped,
- one limb of the L is a sleeve for accommodating the source of gas or evaporable liquid,
- the other limb terminates as the mouthpiece,
- a block:

RECTIFIED SHEET (RULE 91)  
ISA/EP

In this embodiment, the block preferably has an axial communication with the valve tube and the latter has an L configuration when kinked and closed.

In yet another embodiment, a dispenser is provided for a gaseous, gas borne or droplet substance, the dispenser including a valve of the invention and further comprising:

- a body including a mouthpiece with an inhalation/insufflation orifice at its distal end,
- a source of the substance in pressurised gaseous or liquid form of the type having a container and a depressable outlet tube which releases a dose on depression towards the container and
- depression means for releasing a dose, the depression means including:
  - a depression spring arranged to act on the source for releasing a dose,
  - a pneumatic actuator for resisting the action of the spring when a chamber of the actuator is closed,
  - a port opening into the chamber,
  - means for compressing the spring to cock the dispenser and
  - non-return means for allowing air to escape from the chamber as it is compressed for cocking,

and wherein:

- the vane is movably mounted in the body for movement from a rest position towards the orifice by the act of inhalation and
- the valve is arranged for controlling the port into the chamber, the port being the outlet from the valve, the flexible tube being secured at its inlet end to the breath actuable vane for movement therewith, the tube being linked to an obturating extent when the vane is in its rest position and unlinked when the vane is moved towards the orifice on inhalation for release of the contents of the container by allowing air to enter the chamber and the spring to act to release the dose.

RECTIFIED SHEET (RULE 91)  
ISA/EP

In this embodiment, the vane is preferably a flap pivotally mounted in the body and the spring is a torsion spring acting about the pivot of the flap in body.

Whilst the dispensers may find use for continuous dispensing, normally they will be used for dispensing metered doses. These may be released by the source of gas or liquid in measured doses. However it is envisaged that the source may be arranged to release into a space at least partially limited by an obturating link to measure the dose.

To help understanding of the invention, two specific embodiments thereof will now be described by way of example and with reference to the accompanying drawings, in which:

Figure 1 is a cross-sectional side view of a dispenser according to the invention, with its piston and linked tube at rest in its obturating position,

Figure 2 is a similar view with the dispenser with the piston moved forwards to open the tube,

Figure 3 is a cross-sectional side view of another dispenser according to the invention, with its piston and linked tube at rest in its obturating position,

Figure 4 is a similar view with the dispenser of Figure 3 with its piston moved forwards to open its tube,

Figure 5 is a similar view of a further dispenser according to the invention,

Figure 6 is a view similar to Figure 1 of a fourth dispenser according to the invention,

Figure 7 is a similar view of a fifth dispenser according to the invention,

Figure 8 is a diagrammatic view of an alternative obturation arrangement, and

Figure 9 is a similar diagrammatic view of another alternative obturation arrangement.

Turning first to Figures 1 and 2, the dispenser 1 there shown is for a medication contained in a pressurised aerosol canister or container 2 and dissolved/suspended in the aerosol propellant. The container is mounted in an injection moulded, polypropylene body 3 of the dispenser, within a sleeve 4 in a manner allowing air flow to pass the container, with the aerosol outlet tube 5 received in a

RECTIFIED SHEET (RULE 91)  
ISA/EP

socket 6 in a block 7 upstanding from the floor 8 of the body. The container is of the type which dispenses a measured dose on depression of the tube towards the container's body 9. In practice, the depression is achieved by pressure between the end 10 of the container and the floor 8. The tube 5 is a gas tight seal in the socket 6, so that a released dose is retained in the dispenser, by the valve of the invention which will now be described.

The block has a polyethylene tube 11 adhered into a side opening 12 of the block, in communication with the socket 6. The tube has a pair 13,14 of kinks in it. Its end opposite from the block is adhered into a piston 15 at a throughbore 16. The piston is housed in a cylinder 17 formed in the body 3. To the outside of the cylinder is clipped an extension 18 of the body, having a mouthpiece 19 with an inhalation orifice 20. The arrangement provides an enlargement 21 in the bore 22 of the cylinder 17. The enlargement steps down in diameter to that of the (non-circular) mouthpiece, providing an abutment for a spring 23 acting on the piston and urging it in the direction of the block.

Normally the tube is kinked 13,14 by the action of the spring to such extent that it is obturated and acts as a valve 24. Thus when a dose is released into the socket 6, it is contained by the valve 24. On inhalation through the mouthpiece, the piston is drawn towards the mouthpiece against the action of the spring by the reduced pressure in the mouthpiece. This movement to the position shown in Figure 2 is limited by the spring becoming coil-bound. Air can then flow around the piston via notches 25 in a skirt 26 of the piston at the cylinder's step in diameter. When the piston is in this position, the tube has straightened sufficiently to release the obturation at the kinks, so that the dose can flow through the throughbore 16 which has a mouth 27 shaped for aerosol dispersion. Thus the dose is released for inhalation by the patient.

Turning now to Figures 3 & 4, the dispenser 101 there shown has its aerosol container 102 located in a sleeve 103 of the dispenser body at an internal step 103.1, against which the rolled on cap 102.1 of the container shuts. Resilient studs 103.2, over which the cap rides on insertion of the container into the sleeve, spring out behind the cap to capivate the container. The container's outlet tube 105 has a polyethylene tube

RECTIFIED SHEET (RULE 91)  
ISA/EP

111 connected to it by a movable actuation block 107, which is bifurcated in its middle section with the tube passing through the bifurcation 107.1. The remote end 107.2 of the actuation block is in the form of a button extends through an aperture 110.1 in the floor 108 of the body.

The piston 115, cylinder 117, spring 123 and mouthpiece 119 of the dispenser 101 are similar to those of the dispenser 1 and will not be described in detail.

The tube 111 is kinked 113 and of such length that when the piston is at rest, the kink 113 is on the opposite side of the axis 105.1 of the outlet tube and closes the valve 124 of which it is the operative part. On inhalation the piston moves the tube sufficiently for the kink to unseat.

For use of the device, the button 107.2 is pressed inwards. The container's valve is an ordinary release valve, as opposed to a metering valve and the outlet tube 105 and the polyethylene tube 111 down to the kink fills with released aerosol liquid. The button is then released so that the volume of the dose is determined by the volume of the tubes 105,111 to the kink. Then on inhalation, the dose is released in the manner of the first embodiment.

Turning now to Figure 5, the dispenser 201 there shown includes an aerosol medication container 202 in a body 203. The aerosol outlet tube 205 is received in a socket 206 in block 207 upstanding from the floor 208 of the body. A mouthpiece 219 is provided adjacent the block 207. The opposite end of the container is received in a short sleeve/piston 204, which is arranged as a piston in a second sleeve/cylinder 204.1. The latter is moulded integrally with the body 203. A spring 204.2 urges the piston out of the cylinder, whilst a slide knob 204.3 is provided for urging the piston inwards. The piston is moulded with an integral lip 204.4, which allows air in the cylinder to pass out on inwards movement of the piston, but does not allow air into the cylinder under the action of the spring 204.2. Thus whilst the cylinder remains closed, after cocking of the dispenser by pushing of the knob 204.3 upwards, the piston 204 is pneumatically held in position until released, whereupon the action of the spring forces

RECTIFIED SHEET (RULE 91)  
ISA/EP

the container down causing movement of the outlet tube inwards of the container for dispensing of the aerosol medication.

Pivotaly mounted on the end 204.5 of the cylinder 204.1, is a flap 215, which is urged to its position shown in Figure 5 by a torsion spring 223, mounted on a pivot pin 223.1. A tube 211 with kinks 213,214 is adhered at one end into an opening 212 in the cylinder end 204.5. The other end of the tube is clipped 215.1 to the flap 215. In practice to accommodate the tube, the kink 213 may be a bend not completely obturating the tube, but with the kink 214 obturating the tube in the Figure 5 position.

The top of the body 203 has an air inlet opening 231 and an air passage 232 is provided to connect the mouthpiece to the space 233 on the side of the flap 215 opposite from the inlet 231.

On cocking of the dispenser as described above, the kink valve 224 prevents air from entering the cylinder, despite the action of the spring 204.2. On inhalation through the mouthpiece, a pressure differential is developed across the flap 215, pivoting it down against its spring 223. This movement unlinks the tube 211 sufficiently for air to pass through it which allows the spring 204.2 to actuate dispensing from the container.

Turning now to Figure 6, the dispenser there shown is largely similar to the dispenser of Figures 1 & 2. The chief difference is that the spring 323 is a tension spring of elastomeric material. It is of the type having moulded end formations 323.1,323.2, which enable it to be fitted by drawing outer ones 323.2 through apertures 323.3 in the piston 315 of the dispenser. The arrangement is such that the formations 323.1,323.2 close the apertures 323.3. The middle portion 323.4 of the spring is taken around the block 307 for the outlet tube 305 of the aerosol container 302. A step 323.5 is provided for locating the spring. The latter draws the piston 315 against a step 315.1 moulded within the root of the mouthpiece 319, which is an integral moulding with the body 303 of the dispenser. With the piston against the stop, the kink tube 311 is closed in Z formation with closed kinks at the corners. Within the orifice of the mouthpiece, a series of ribs 319.1 are provided for the guiding the skirt 315.2 of the

RECTIFIED SHEET (RULE 91)  
ISA/EP

piston, whilst at the same time allowing an air passage around the piston enabling air to be inhaled past it when the piston has been drawn forwards to open the valve and allow air to pass into the mouthpiece via notches 325 in the inner skirt.

Although the spring is shown as an elastomeric spring, it could be replaced by a metal coil spring.

Turning on to Figure 7, this dispenser has no spring for holding the piston back and the valve closed before inhalation. It does have a detent 4151 moulded as an inwards extension of the skirt 4152 of a piston 415. Also the skirt has attached to it a knob 4153, for manually moving the piston. The bore of the mouthpiece has two notches 4191, 4192 moulded internally for co-operation with the detent. The mouthpiece also has a slot 4193 for the knob 4153. This arrangement allows the dispenser to be stored with the kink valve open and the detent engaged in the outer notch 4191. When it is to be used, the dosage mechanism in the canister 402 can be primed by depression of the canister until a dose is expelled through the piston. Then the piston is slid back by use of the knob so as to engage the detent in the inner notch 4192. This closes the valve and a dose to be inhaled can be released into the kink tube by depression of the canister 402. On inhalation, the frictional location of the piston by the detent is overcome by the inhalation, the piston moves forwards and the dose is released. For the next dose, the piston is moved back for the process to be repeated.

Lastly referring to Figures 8 and 9, there are shown two alternative configurations for kink valve tubes. In each, a loop of tube is shown unlinked in full lines and kinked in broken lines. Figure 8 shows a Y or M configuration, in which action on the loop 500 from the end creates two kinks 501, 502. Where the material of the tube is at least slightly elastic, the unlinked shape is recovered without assistance due to bending in the three sections 503, 504, 505 into which the tube is divided by the kinks. In Figure 9, action on the loop 510 from the sides results in one kink 511. Since the two sections 512, 513 of the tube are not under bending, a restoring force in the direction of arrows 514 is required to unlink the tube.

RECTIFIED SHEET (RULE 91)  
ISA/EP

#### CLAIMS:

1. A valve comprising:
  - a valve inlet,
  - a valve outlet,
  - a flexible tube extending between the inlet and the outlet, the tube having a movable portion which is movable between an closed position in which the tube is kinked for closure of the valve and an open position in the tube is un-kinked for opening of the valve and
  - a movable member for moving the movable portion of the tube to control the kinking of the tube.
2. A valve as claimed in claim 1, wherein the tube has a single kink when the movable member and the movable portion of the tube are in their closed position, the tube then preferably having a V or L configuration.
3. A valve as claimed in claim 1, wherein the tube has a pair of kinks when the movable member and the movable portion of the tube are in their closed position, the tube then preferably having a Y, M or Z configuration.
4. A valve as claimed in claim 1, claim 2 or claim 3, wherein the movable portion of the tube is an end portion of the tube, connected to or providing the inlet or the outlet of the valve.
5. A valve as claimed in claim 4, wherein the end portion of the tube is movable axially to kink and un-kink the tube, i.e. to close and open the valve.
6. A valve as claimed in claim 4 or claim 5, wherein the end portion of the tube is movable angularly to kink and un-kink the tube, i.e. to close and open the valve.
7. A valve as claimed in claim 1, claim 2 or claim 3, wherein the movable portion of the tube is a middle portion of the tube, between end portions connected to or providing the inlet and the outlet of the valve.
8. A valve as claimed in any preceding claim, wherein the valve is normally closed, a spring being provided to urge the movable member to its closed position.
9. A valve as claimed in any preceding claim, wherein the valve is breath actuable, the movable member being a vane movable by inhalation and/or exhalation.
10. A dispenser for a gaseous, gas borne or droplet substance, the dispenser including a valve as claimed in claim 9 and further comprising:

RECTIFIED SHEET (RULE 91)  
ISA/EP

The invention is not intended to be restricted to the details of the above described embodiments. For instance, the two tubes 105 and 111 can be integrally formed. The dispenser may be a dry powder dispenser either having means for dispensing a pre-measured dose of powder or metering a dose of powder, either of which is fluidised for inhalation by a dose of gas released by a kink valve operated by a piston or other vane in the manner of the described embodiments. It should also be specifically noted that the invention can be used in nasal insufflation devices as well as mouth inhalation devices. Again it can be envisaged that a mouthpiece cap or a separate clip can be pivoted onto the end of the canister to hold it depressed immediately prior to inhalation.

10 immediately prior to inhalation.

RECTIFIED SHEET (RULE 91)  
ISA/EP

- a body including a mouthpiece with an inhalation/insufflation orifice at its end and
  - a junction for a source of gas or evaporable liquid comprising or containing the said substance,
- and wherein:
- the vane is movably mounted in the body for movement by the act of inhalation from a rest position towards the orifice - or at least in the direction of air flow through the dispenser - and
  - the valve is connected to the junction for controlling the said gas or liquid with the valve inlet being at the junction, the flexible tube extending from the junction for receiving the said gas or liquid and connected at the outlet end to the breath actuable vane for movement thereof, the tube being kinked to an obstructing extent when the vane is in its rest position and un-kinked when the vane is moved on inhalation for release of the gas or liquid.
11. A dispenser as claimed in claim 10, wherein the vane is a piston slidably mounted a bore in the body, preferably at or adjacent the mouthpiece.
  12. A dispenser as claimed in claim 11, wherein the body and/or the piston is provided with an air bypass to enable air to be inhaled to bypass the piston when it has moved the tube to its un-kinked, open position.
  13. A dispenser as claimed in claim 12, wherein the bypass is a series of notches in a skirt of the piston and an enlargement in the bore, the bypass opening when the notches move into register with the enlargement.
  14. A dispenser as claimed in claim 11, claim 12 or claim 13, wherein:
    - the piston is provided with a manually actuable member extending through a wall of its bore and
    - the piston and its bore are provided with a notch and detent mechanism for holding the piston in either or both of its open and closed positions, whereby the piston can be manually moved to and held in its position holding the tube in its kinked, closed and/or to its un-kinked open position by engagement of the notch and detent mechanism.

RECTIFIED SHEET (RULE 91)  
ISA/EP

15

15. A dispenser as claimed in claim 11, claim 12 or claim 13, wherein the piston is provided with a manually actuatable member for holding it in its open position with the tube un-kinked and open for purging discharge from the said source.

16. A dispenser as claimed in any one of claims 10 to 15, wherein the spring is a compression spring biasing the piston inwardly of the mouthpiece, the spring acting between the piston and an abutment in the body.

17. A dispenser as claimed in any one of claims 10 to 15, the valve being in accordance with claim 8, wherein the spring is a tension spring biasing the piston inwardly of the mouthpiece, the piston and a formation in the body being adapted to connect to the spring for its biasing of the piston.

18. A dispenser as claimed in any one of claims 11 to 17 for use with a source of the substance in pressurised gaseous or liquid form of the type which releases a dose on depression of an outlet tube of the source, wherein:

- the body is generally L-shaped,
- one limb of the L is a sleeve for accommodating the source of gas or evaporable liquid,
- the other limb terminates as the mouthpiece,
- a block:
  - is provided integrally with and laterally of the body in line with the one limb,
  - has a socket for receiving an outlet tube of the source and
  - is the junction to the valve with the socket in communication with the valve tube, and
- the piston is the outlet from the valve and has the valve tube in communication with a throughbore in the piston,

the arrangement being such that depression of the source in the one limb releases a dose of the said substance into the valve tube for release on valve opening by inhalation.

19. A dispenser as claimed in claim 18, the valve being in accordance with claim 3, wherein the block has a lateral communication with the valve tube and the latter has a Z configuration when kinked and closed.

RECTIFIED SHEET (RULE 91)  
ISA/E/P

17

- a port opening into the chamber,
- means for compressing the spring to cock the dispenser and
- non-return means for allowing air to escape from the chamber as it is compressed for cocking.

and wherein:

- the valve is movably mounted in the body for movement from a rest position towards the orifice by the act of inhalation and
- the valve is arranged for controlling the port into the chamber, the port being the outlet from the valve, the flexible tube being secured at its inner end to the breath actuatable vane for movement thereof, the tube being kinked to an obscuring extent when the vane is in its rest position and unlinked when the vane is moved towards the orifice on inhalation for release of the contents of the container by allowing air to enter the chamber and the spring to act to release the dose.

23. A dispenser as claimed in claim 22, the valve being in accordance with claims 6 and 8, wherein the vane is a flap pivotally mounted in the body.

24. A dispenser as claimed in claim 23, wherein the spring is a torsion spring acting about the pivot of the flap in body.

RECTIFIED SHEET (RULE 91)  
ISA/E/P

16

20. A dispenser as claimed in any one of claims 11 to 17 for use with a source of the substance in pressurised gaseous or liquid form of the type which releases a dose on depression of an outlet tube of the source, wherein:

- the body is generally L-shaped,
- one limb of the L is a sleeve for accommodating and capturing the source of gas or evaporable liquid,
- the other limb terminates as the mouthpiece,
- a block:
  - is provided movably in the body in line with the one limb,
  - has a socket for receiving an outlet tube of the source inside the body and an actuation button outside the body and
  - is the junction to the valve with the socket in communication with the valve tube, and
- the piston is the outlet from the valve and has the valve tube in communication with a throughbore in the piston,

the arrangement being such that depression of the button towards the body releases a dose of the said substance into the valve tube for release on valve opening by inhalation.


21. A dispenser as claimed in claim 20, the valve being in accordance with claim 2, wherein the block has an axial communication with the valve tube and the latter has an L configuration when kinked and closed.

22. A dispenser for a gaseous, gas borne or droplet substance, the dispenser including a valve as claimed in claim 9 and further comprising:

- a body including a mouthpiece with an inhalation/insufflation orifice at its distal end,
- a source of the substance in pressurised gaseous or liquid form of the type having a container and a depressible outlet tube which releases a dose on depression towards the container and
- depression means for releasing a dose, the depression means including:
  - a depression spring arranged to act on the source for releasing a dose,
  - a pneumatic actuator for resisting the action of the spring when a chamber of the actuator is closed,

RECTIFIED SHEET (RULE 91)  
ISA/E/P

1/7

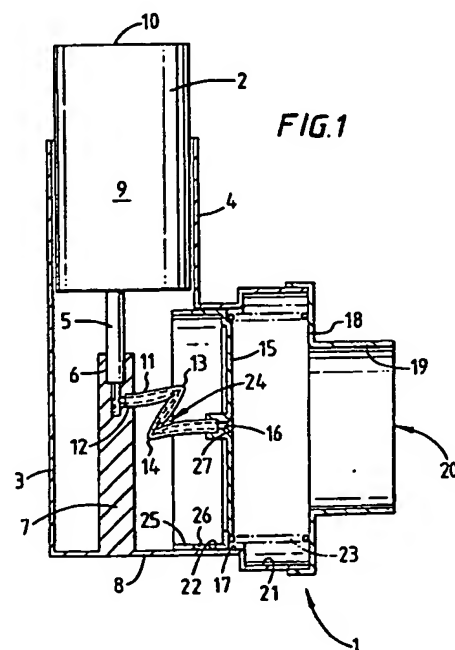

SUBSTITUTE SHEET (RULE 26)

2/7

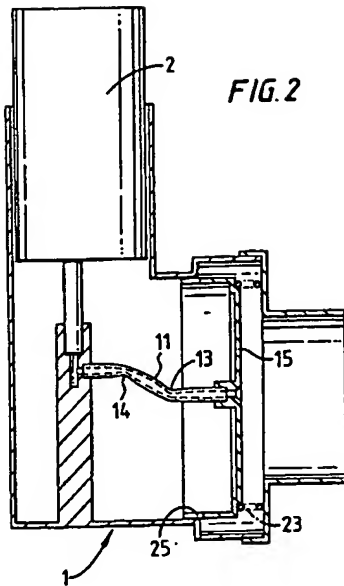


FIG. 2

SUBSTITUTE SHEET (RULE 26)

3/7

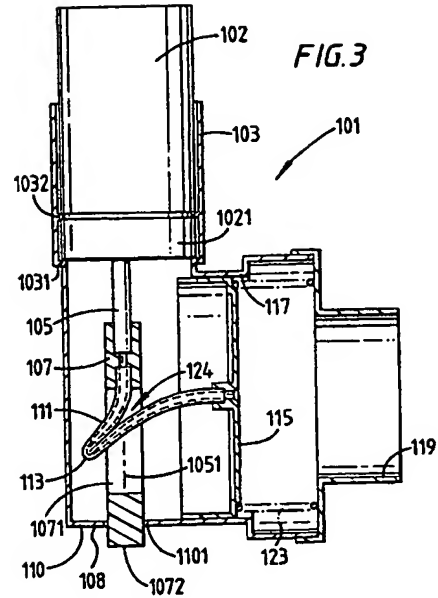


FIG. 3

SUBSTITUTE SHEET (RULE 26)

4/7

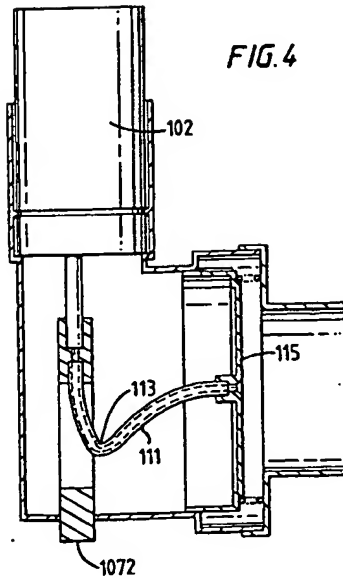


FIG. 4

SUBSTITUTE SHEET (RULE 26)

5/7



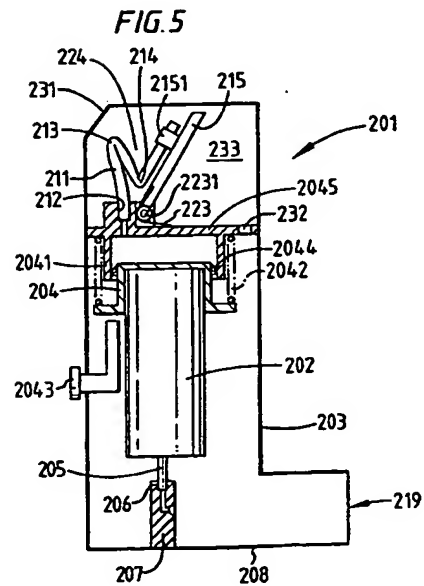


FIG. 5

SUBSTITUTE SHEET (RULE 26)

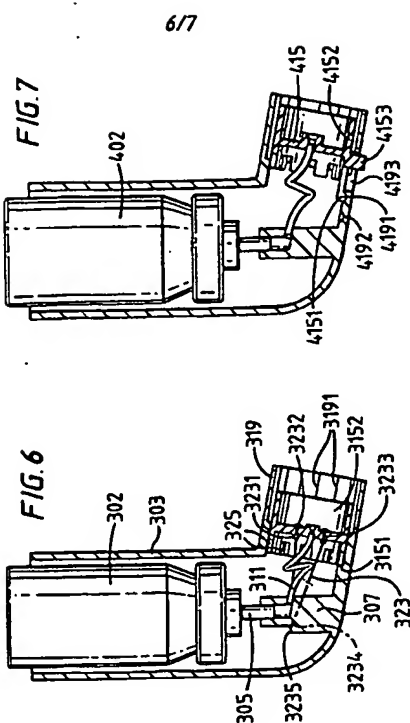

SUBSTITUTE SHEET (RULE 26)

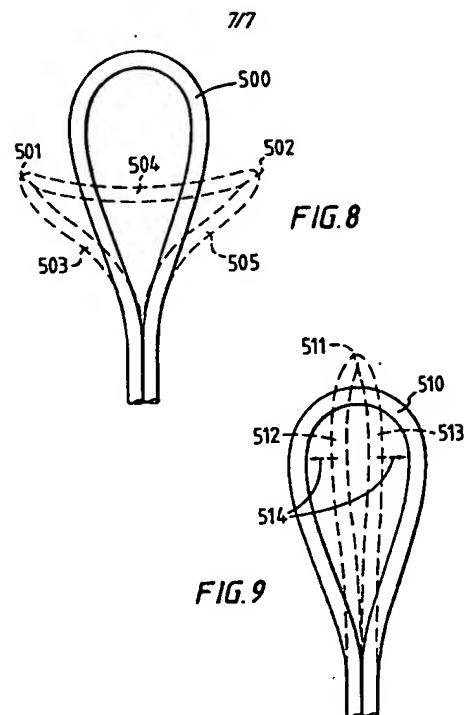

SUBSTITUTE SHEET (RULE 26)

## INTERNATIONAL SEARCH REPORT

App. No. PCT/GB 98/00770

1. CLASSIFICATION OF SUBJECT MATTER IPC 6 A61M15/00		
2. FIELD SEARCHED IPC 6 B65D A61M F16K		
3. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Relevant to claim 1	Relevant to claim 2
I	DE 33 24 699 C (B. BRAUN MELSUNGEN) 6 December 1984 see abstract see column 6, line 38 - line 51 see figures 2, 6, 12	1-5, 8
I	FR 2 204 766 A (CRINOSPITAL) 24 May 1974 see figures 1, 2	1, 2, 7
I	DE 37 34 894 C (B. BRAUN MELSUNGEN) 26 January 1989 see figures 1, 2	1, 6
A	US 3 187 748 A (MITCHELL, PAULIUS) 8 June 1965 see column 3, line 3 - line 10 see column 3, line 46 - line 54 see figures 1-6	9, 10, 22
4. OTHER INFORMATION		
5. SUMMARY OF THE INVENTION		
6. STATE OF THE ART		
7. BRIEF DESCRIPTION OF THE DRAWINGS		
8. BRIEF DESCRIPTION OF THE INVENTION		
9. CLAIMS		
10. ABSTRACT		
11. OTHER INFORMATION		
12. OTHER INFORMATION		
13. OTHER INFORMATION		
14. OTHER INFORMATION		
15. OTHER INFORMATION		
16. OTHER INFORMATION		
17. OTHER INFORMATION		
18. OTHER INFORMATION		
19. OTHER INFORMATION		
20. OTHER INFORMATION		
21. OTHER INFORMATION		
22. OTHER INFORMATION		
23. OTHER INFORMATION		
24. OTHER INFORMATION		
25. OTHER INFORMATION		
26. OTHER INFORMATION		
27. OTHER INFORMATION		
28. OTHER INFORMATION		
29. OTHER INFORMATION		
30. OTHER INFORMATION		
31. OTHER INFORMATION		
32. OTHER INFORMATION		
33. OTHER INFORMATION		
34. OTHER INFORMATION		
35. OTHER INFORMATION		
36. OTHER INFORMATION		
37. OTHER INFORMATION		
38. OTHER INFORMATION		
39. OTHER INFORMATION		
40. OTHER INFORMATION		
41. OTHER INFORMATION		
42. OTHER INFORMATION		
43. OTHER INFORMATION		
44. OTHER INFORMATION		
45. OTHER INFORMATION		
46. OTHER INFORMATION		
47. OTHER INFORMATION		
48. OTHER INFORMATION		
49. OTHER INFORMATION		
50. OTHER INFORMATION		
51. OTHER INFORMATION		
52. OTHER INFORMATION		
53. OTHER INFORMATION		
54. OTHER INFORMATION		
55. OTHER INFORMATION		
56. OTHER INFORMATION		
57. OTHER INFORMATION		
58. OTHER INFORMATION		
59. OTHER INFORMATION		
60. OTHER INFORMATION		
61. OTHER INFORMATION		
62. OTHER INFORMATION		
63. OTHER INFORMATION		
64. OTHER INFORMATION		
65. OTHER INFORMATION		
66. OTHER INFORMATION		
67. OTHER INFORMATION		
68. OTHER INFORMATION		
69. OTHER INFORMATION		
70. OTHER INFORMATION		
71. OTHER INFORMATION		
72. OTHER INFORMATION		
73. OTHER INFORMATION		
74. OTHER INFORMATION		
75. OTHER INFORMATION		
76. OTHER INFORMATION		
77. OTHER INFORMATION		
78. OTHER INFORMATION		
79. OTHER INFORMATION		
80. OTHER INFORMATION		
81. OTHER INFORMATION		
82. OTHER INFORMATION		
83. OTHER INFORMATION		
84. OTHER INFORMATION		
85. OTHER INFORMATION		
86. OTHER INFORMATION		
87. OTHER INFORMATION		
88. OTHER INFORMATION		
89. OTHER INFORMATION		
90. OTHER INFORMATION		
91. OTHER INFORMATION		
92. OTHER INFORMATION		
93. OTHER INFORMATION		
94. OTHER INFORMATION		
95. OTHER INFORMATION		
96. OTHER INFORMATION		
97. OTHER INFORMATION		
98. OTHER INFORMATION		
99. OTHER INFORMATION		
100. OTHER INFORMATION		

## INTERNATIONAL SEARCH REPORT

App. No. PCT/GB 98/00770

1. CLASSIFICATION OF SUBJECT MATTER IPC 6 A61M15/00		
2. FIELD SEARCHED IPC 6 B65D A61M F16K		
3. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Relevant to claim 1	Relevant to claim 2
A	GB 1 012 565 A (COWARD THORNTON) 10 February 1960 see figures 1, 2	
A	FR 2 471 535 A (TOKAI SEIKI CO.) 19 June 1981 see figures 10, 13	
A	FR 2 483 262 A (FUMAKILLA) 4 December 1981 see figures 35-38	
4. OTHER INFORMATION		
5. SUMMARY OF THE INVENTION		
6. STATE OF THE ART		
7. BRIEF DESCRIPTION OF THE DRAWINGS		
8. BRIEF DESCRIPTION OF THE INVENTION		
9. CLAIMS		
10. ABSTRACT		
11. OTHER INFORMATION		
12. OTHER INFORMATION		
13. OTHER INFORMATION		
14. OTHER INFORMATION		
15. OTHER INFORMATION		
16. OTHER INFORMATION		
17. OTHER INFORMATION		
18. OTHER INFORMATION		
19. OTHER INFORMATION		
20. OTHER INFORMATION		
21. OTHER INFORMATION		
22. OTHER INFORMATION		
23. OTHER INFORMATION		
24. OTHER INFORMATION		
25. OTHER INFORMATION		
26. OTHER INFORMATION		
27. OTHER INFORMATION		
28. OTHER INFORMATION		
29. OTHER INFORMATION		
30. OTHER INFORMATION		
31. OTHER INFORMATION		
32. OTHER INFORMATION		
33. OTHER INFORMATION		
34. OTHER INFORMATION		
35. OTHER INFORMATION		
36. OTHER INFORMATION		
37. OTHER INFORMATION		
38. OTHER INFORMATION		
39. OTHER INFORMATION		
40. OTHER INFORMATION		
41. OTHER INFORMATION		
42. OTHER INFORMATION		
43. OTHER INFORMATION		
44. OTHER INFORMATION		
45. OTHER INFORMATION		
46. OTHER INFORMATION		
47. OTHER INFORMATION		
48. OTHER INFORMATION		
49. OTHER INFORMATION		
50. OTHER INFORMATION		
51. OTHER INFORMATION		
52. OTHER INFORMATION		
53. OTHER INFORMATION		
54. OTHER INFORMATION		
55. OTHER INFORMATION		
56. OTHER INFORMATION		
57. OTHER INFORMATION		
58. OTHER INFORMATION		
59. OTHER INFORMATION		
60. OTHER INFORMATION		
61. OTHER INFORMATION		
62. OTHER INFORMATION		
63. OTHER INFORMATION		
64. OTHER INFORMATION		
65. OTHER INFORMATION		
66. OTHER INFORMATION		
67. OTHER INFORMATION		
68. OTHER INFORMATION		
69. OTHER INFORMATION		
70. OTHER INFORMATION		
71. OTHER INFORMATION		
72. OTHER INFORMATION		
73. OTHER INFORMATION		
74. OTHER INFORMATION		
75. OTHER INFORMATION		
76. OTHER INFORMATION		
77. OTHER INFORMATION		
78. OTHER INFORMATION		
79. OTHER INFORMATION		
80. OTHER INFORMATION		
81. OTHER INFORMATION		
82. OTHER INFORMATION		
83. OTHER INFORMATION		
84. OTHER INFORMATION		
85. OTHER INFORMATION		
86. OTHER INFORMATION		
87. OTHER INFORMATION		
88. OTHER INFORMATION		
89. OTHER INFORMATION		
90. OTHER INFORMATION		
91. OTHER INFORMATION		
92. OTHER INFORMATION		
93. OTHER INFORMATION		
94. OTHER INFORMATION		
95. OTHER INFORMATION		
96. OTHER INFORMATION		
97. OTHER INFORMATION		
98. OTHER INFORMATION		
99. OTHER INFORMATION		
100. OTHER INFORMATION		

## INTERNATIONAL SEARCH REPORT

Pub. No. of International Application No.  
PCT/GB 98/00770

Information on patent family members

Patent document (first in search report)	Publication date	Patent family member(s)	Publication date
DE 3324599 C	05-12-1984	NONE	
FR 2204766 A	24-05-1974	AR 201672 A	08-04-1975
		AU 6191073 A	01-05-1975
		BE 806640 A	15-02-1974
		CH 565344 A	15-08-1975
		DD 103141 A	05-09-1974
		DE 2353624 A	09-05-1974
		GB 1403826 A	20-08-1975
		JP 49133930 A	23-12-1974
		KL 7314901 A	02-05-1974
		US 3913682 A	21-10-1975
		ZA 7363398 A	25-09-1974
DE 3734894 C	26-01-1989	DE 3868829 A	09-04-1992
		EP 0312073 A	19-04-1989
US 3187748 A	08-06-1965	NONE	
GB 1012565 A		NONE	
FR 2471535 A	19-06-1981	JP 1165461 C	26-08-1983
		JP 56082322 A	06-07-1981
		JP 57058568 B	10-12-1982
		DE 3046508 A	17-09-1981
		US 4457699 A	03-07-1984
FR 2483262 A	04-12-1981	GB 2079183 A,B	20-01-1982

Form PCT/ISA(2004) (English only) (July 2004)